

WITTKE

Xpress



Wittke Xpress

WITTKE POWER. XPRESS PERFORMANCE.
NEW EVOLUTION IN COMMERCIAL SIDE-LOADERS.

The Wittke Xpress™ sets a new benchmark in the commercial side-loader market by integrating industry-leading technology from Labrie's Automizer™ side loaders with the proven durability of Wittke™ engineering. Designed for efficiency, strength, and adaptability, the Xpress™ combines advanced body and arm technology with superior weight distribution, high-performance automation, and enhanced durability.

With capacities ranging from 23 yd³ to 35 yd³, dual-side arm operation, and a state-of-the-art Envirolink™ Multiplex system, the Xpress™ is engineered to streamline operations, improve accessibility, and maximize efficiency for the most demanding collection routes.

Laying the foundations for a truly exceptional product.

WITTKE™ INNOVATIONS

With a strong emphasis on innovation, Wittke's engineering team has crafted a comprehensive range of customizable options to cater to even the most stringent customer requirements. We are poised and eager to embrace emerging industry trends and fulfill evolving customer demands. This perpetual cycle of innovation positions Wittke™ as the forefront leader in side loader solutions across North America.

WEIGHT DISTRIBUTION

Over years of innovation, Wittke™ trucks prioritize ideal weight distribution. Our ongoing objective is to achieve the perfect material balance, ensuring units collect more waste while maintaining the highest legal payload.



ENVIROLINK™ HAS LAID THE FOUNDATIONS FOR A BRAND-NEW ERA IN TRUCK INTELLIGENCE.

An improved multiplex network and analog system, cameras and monitors, scales, diagnostic tools, safety interlocks, alerts, GPS tracking, and more are now packaged in a more precise, reliable, and efficient Smart Collection Package.

Tailgates ranging from 2 yd³ to 4 yd³ based on body capacity

23yd³ to 35yd³ body sizes available

Proven automizer-based hydraulics using single valve design

Automated arm operates on both sides for increased flexibility

Envirolink Multiplex integration

Single piece abrasion resistant steel body wall construction

ANSI Z245.1-compliant with enhanced grease points, upgraded bushings, and safety logic improvements

Hopper redesign with Wittke cylinder attachments and reinforced structure

Hybrid packer system with Wittke-grade shoes, slides, and cylinder mounts

	AUTOMATED	MANUAL	RESIDENTIAL	COMMERCIAL	DEMOLITION	ORGANICS	ALLEYS TIGHT AREAS	RECYCLING	TIPTO DUMP	FULL EJECT	SPLIT BODY	50>82 DGE	50>96 DGE	50>100 DGE	60>97 DGE	FRAME	ROOF	CAB	TAILGATE	EV
Wittke Xpress	●		●	●			●	●		●					◆ CNG	◆ CNG	◆ CNG		◆ CNG	●



SMART, ACCESSIBLE HYDRAULICS

The single electric-over-hydraulic valve with a PTO-mounted pump ensures precise control. Proportional joystick boosts efficiency; relocated valve improves access and reduces maintenance risks.




BUSHINGS – REINFORCED FOR ENDURANCE

Upgraded bushings and pivots boost durability. Enhanced lubrication with added grease points reduces wear and extends lifespan.



PACKER CYLINDERS

Packer cylinders feature improved sealing, nitrated rods, and integrated shavers to reduce contamination. Bulkhead-mounted grease points offer easier access for fast, efficient maintenance.

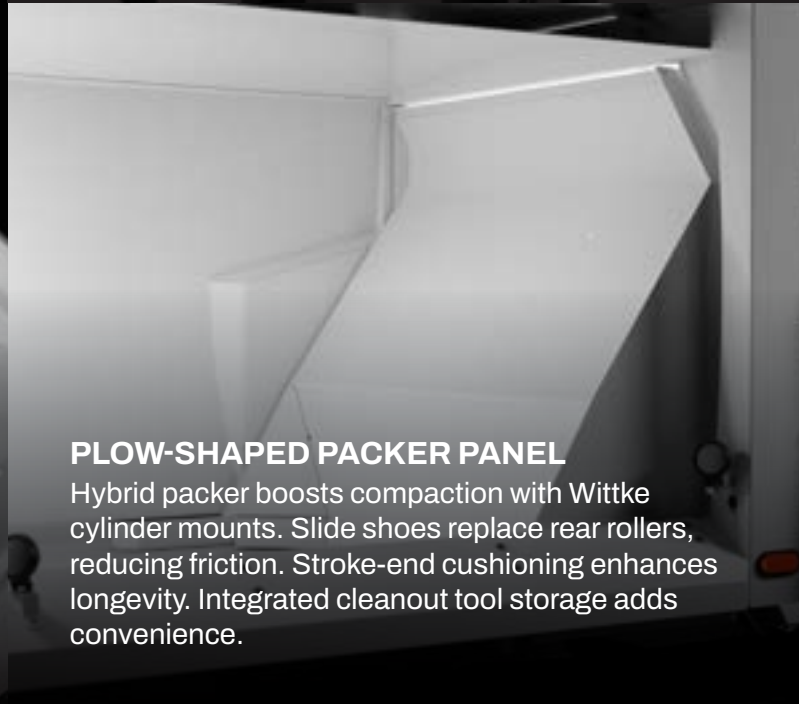

PLOW-SHAPED PACKER PANEL

Hybrid packer boosts compaction with Wittke cylinder mounts. Slide shoes replace rear rollers, reducing friction. Stroke-end cushioning enhances longevity. Integrated cleanout tool storage adds convenience.



BODY – HEAVY-DUTY STRENGTH

A 450-grade steel body with a reinforced Wittke-based floor improves durability. Automizer hinge updates strengthen chassis attachment. EV and CNG-ready configurations allow future adaptability.




SUMP BOX


Larger sump door and expanded liquid trough improve containment. Redesigned access simplifies cleanouts, while the Wittke style ladder enhances safety.

Wittke Xpress Specifications

Body Dimensions

	25 yd ³ (23+2) Low Profile / Short Deck	27 yd ³ (23+4) Low Profile / Short Deck	28 yd ³ (26+2) Low Profile / Long Deck	30 yd ³ (26+4) Low Profile / Long Deck	29 yd ³ (27+2) High Profile / Short Deck	31 yd ³ (27+4) High Profile / Short Deck	33 yd ³ (31+2) High Profile / Long Deck	35 yd ³ (31+4) High Profile / Long Deck
Overall Width (in.)	102							
A. Overall Length, Tailgate Closed (in.)	261.5	277	285.5	301	261.5	277	285.5	301
Overall Height Above Frame with Hopper Wind Flanges, Tailgate Closed (in.)	106				115			
Overall Height Above Frame without Hopper Wind Flanges, Tailgate Closed (in.)	100				109			

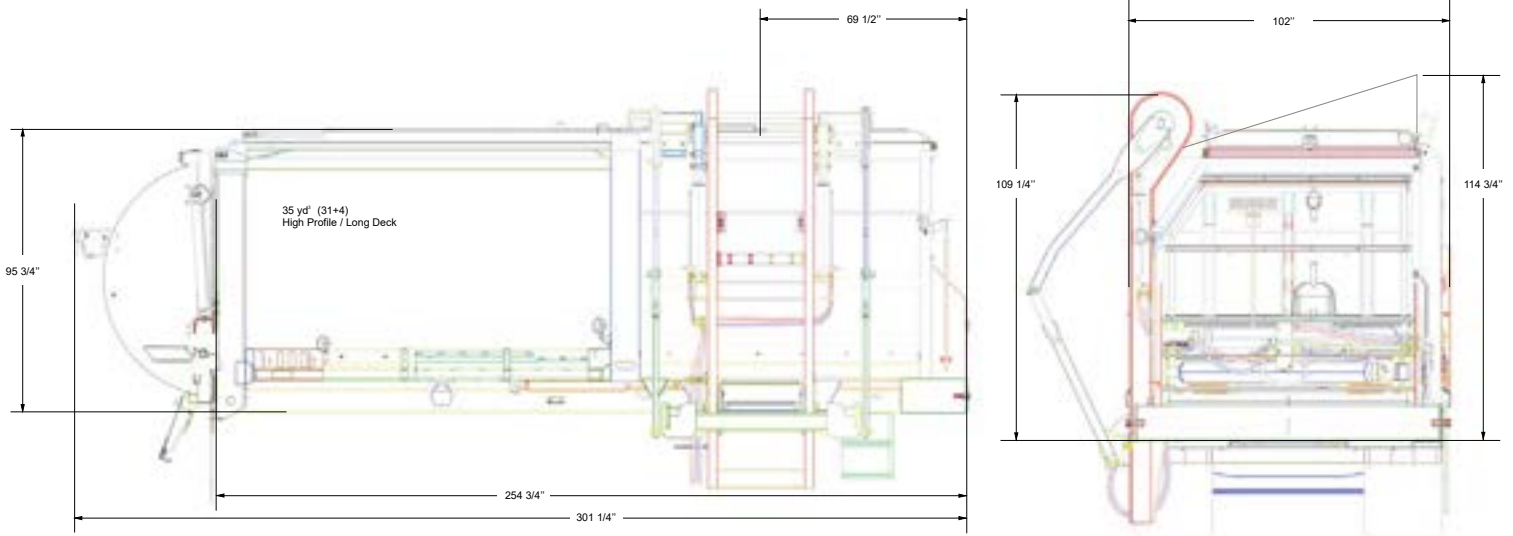

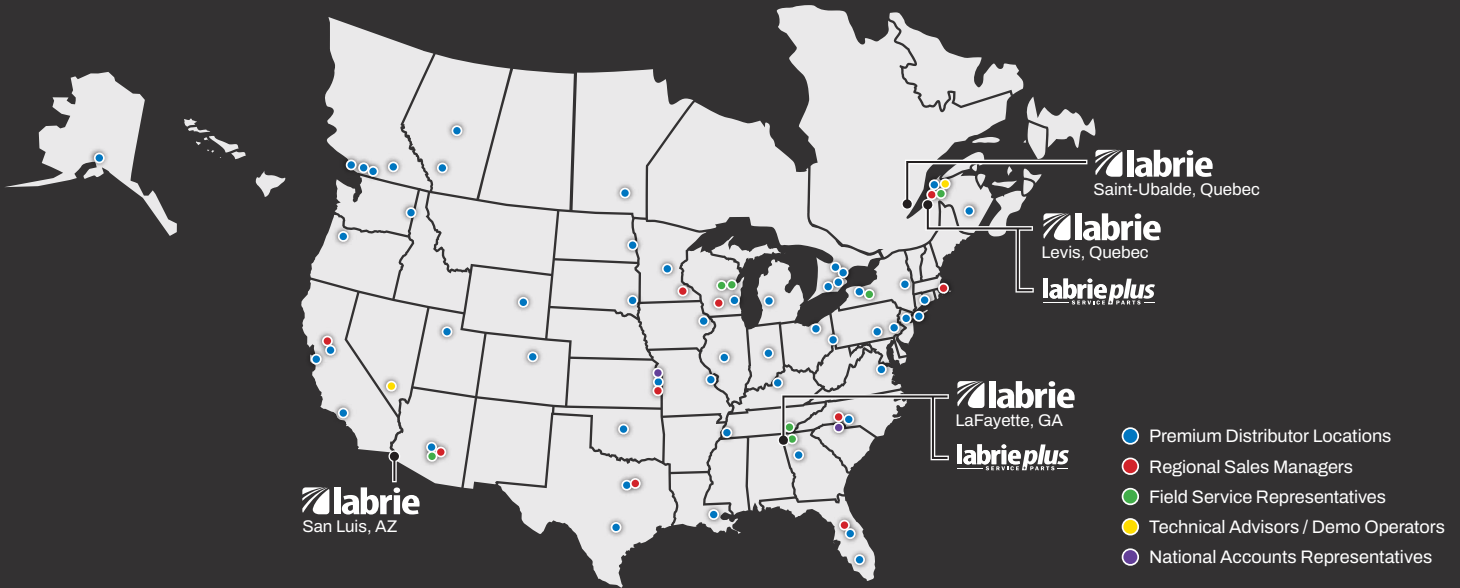

Our North American network is dedicated to quality.

Wittke™ trucks are supported by over 30 top-tier distributors spanning across 50+ sites in the US and Canada, guaranteeing a commitment to driving excellence and providing expert support.



Opt for the Wittke™ Pronto Stock Program when a pre-built model makes sense. Benefit from expedited delivery, cost savings, and a wide selection of models designed to cater to even the most demanding collection needs.



With Sourcewell, save time and money by combining the buying power of more than 50,000 government, education, and nonprofit organizations.



DRIVE EXCELLENCE™



175-B, route Marie-Victorin, Lévis, Quebec, Canada, G7A 2T3
Toll Free: 1-800-463-6638 | Telephone: 418-831-8250
sales@labriegrup.com | www.labriegrup.com



United States of America
1198 Shattuck Industrial Blvd, Lafayette, GA, 30728
Toll Free: 1-800-231-2771
usa.labrieplus.com | partscenter@labrieplus.com

Canada
455 Ave 1, Levis, Quebec, Canada, G6W 5M6
Toll Free: 1-877-452-2743
canada.labrieplus.com | labriepluqc@labriegrup.com